




TIMES MICROWAVE SYSTEMS

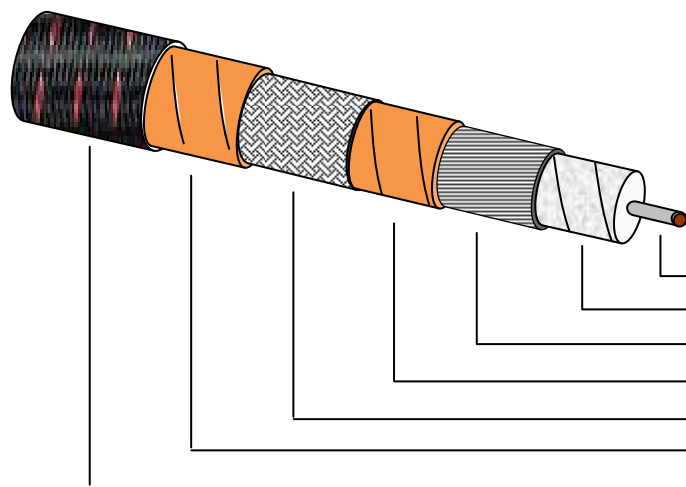

Center Conductor	Silver Plated Copper
Dielectric	Microporus PTFE
Shield	Silver Plated Copper
Interlayer	Metalized Polyimide Tape
Outer Braid	Tin Plated Copper Braid
Jacket	Metalized Polyimide /PS Polyimide
Abrasion Jacket	Black Nomex w/Tracer

Mechanical Characteristics

Diameter: 0.300" maximum
 Minimum Bend Radius (dynamic) 1.750" nominal
 Operating Temperature -65⁰ to +150⁰C
 Weight 85.0-lbs/1000 ft

Electrical Characteristics

Characteristic Impedance 50 Ohms nominal
 Velocity of Propagation 77% nominal
 Shielding -90 dB min (0.5-18 GHz)
 Insertion Loss 0.2476 dB/Ft @ 18.0 GHz
 IL = 0.1644 x √ Freq* + 0.00015 x Freq* (*MHz) dB/100ft

High Performance RF cable AA-8965	Date: 1/6/2012 Revision: -B	TIMES MICROWAVE SYSTEMS Wallingford, CT. 06492-5039 CAGE 68999
www.timesmicrowave.com		MT300

This document contains Times Microwave Systems proprietary information. It shall not be duplicated, used or disclosed in whole or in part to third parties without written authorization from Times Microwave Systems. This technical data is considered ITAR and/or EAR controlled pursuant to 22 CFR Part 120-130 and 15 CFR Parts 730-774 respectively. Transfer of this data by any means to a non-U.S. Person, whether in the United States or abroad, without the proper U.S. Government authorization (e.g., License, exemption, NLR, etc.), is strictly prohibited.